

## CARPORT SPECIFICATIONS

### DESIGN CRITERIA:

SNOW LOAD: 25 PSF  
WIND LOAD: 95 MPH

**COLUMNS:** 3/16" THICK ASTM A-500 GRADE B TUBULAR STEEL (46 KSI). PRIMED WITH RUST PROHIBITIVE FINISH.


**BEAMS:** 10" DEEP A-992 GRADE 50 STEEL. PRIMED WITH RUST PROHIBITIVE FINISH.

**PURLINS:** 16 GA. COLD ROLL GALVANIZED STEEL.

**ROOF:** ROLLFORMED 29 GAUGE PROFILED STEEL PANELS WITH KYNAR 500 FACTORY APPLIED FINISH IN A VARIETY OF COLORS WITH WHITE UNDERSIDE. ATTACHED TO PURLINS AND BEAMS WITH ZINC PLATED CARBON STEEL SCREWS WITH METAL AND NEOPRENE WASHERS.


### AVAILABLE OPTIONS:

- CUSTOMIZED COLUMN SPACING & ROOF PITCH
- SITE SPECIFIC LAYOUTS
- TGIC POLYESTER POWDER COAT
- STANDING SEAM ROOFING
- FULL SOFFIT UNDERSIDE
- SOLAR PANELS & LIGHTING

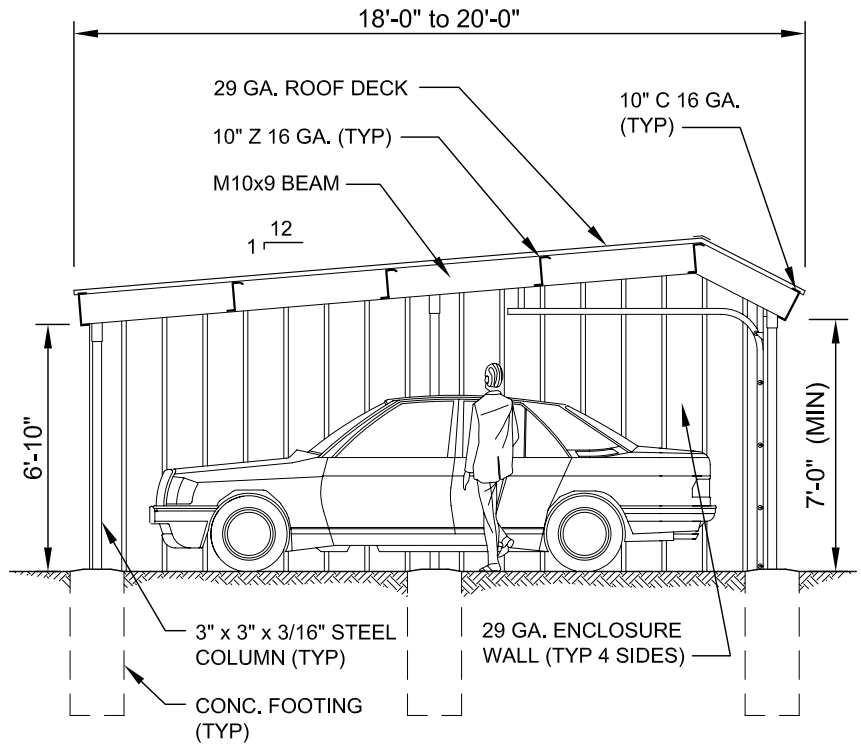

## CROSS SECTION

SCALE: 3/16" = 1'-0"

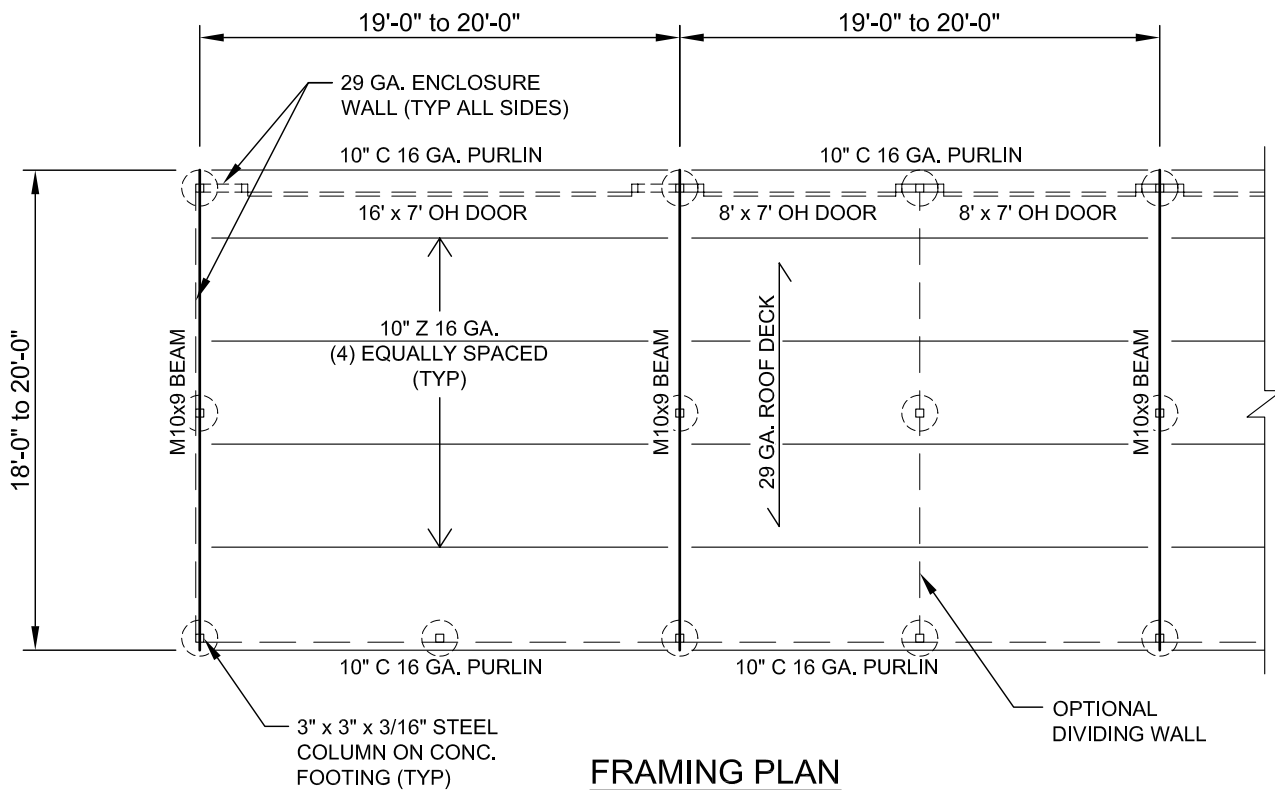

## FRAMING PLAN

SCALE: 1/8" = 1'-0"